

A decorative graphic on the left side of the slide, consisting of several overlapping blue rectangles of varying shades and sizes, creating a layered effect.

# DHCP & NAT

---



# DHCP – Dynamic Host Configuration Protocol

---

# DHCP Motivation

---

## ❑ BOOTP

- Support sending extra information beyond an IP address to a client to enable customized configuration
- Effectively solve one of the major problems that administrators have with manual configuration

## ❑ Problems of BOOTP

- BOOTP normally uses a static method of determining what IP address to assign to a device

## ❑ Dynamic Host Configuration Protocol (DHCP)

- DHCP is an extension of the BOOTP. The first word describe the most important new capability added to BOOTP
  - Assign IP dynamically
  - Move away from static, permanent IP address assignment
- Compatible with BOOTP

# DHCP introduction

---

## ❑ DHCP

- Dynamic address assignment
  - A pool of IP address is used to dynamically allocate addresses
  - Still support static mapping of addresses
- Enable a DHCP client to “lease” a variety of network parameters
  - IP, netmask
  - Default router, DNS servers
  - A system can connect to a network and obtain the necessary information dynamically

## ❑ Client-Server architecture

- DHCP client broadcasts request for configuration info.
  - UDP port 68
- DHCP server reply on UDP port 67, including
  - IP, netmask, DNS, router, IP lease time, etc.

## ❑ RFC

- RFC 2131 – Dynamic Host Configuration Protocol
- RFC 2132 – DHCP Options

## ❑ Two main function of DHCP

- Provide a mechanism for assigning addresses
- A method by which clients can request addresses and other configurations

# DHCP Address Assignment

---

- ❑ Address allocation mechanisms
  - Provide flexibility for configuring addresses on different types of clients
  - Three different address allocation mechanisms
    - Manual allocation
      - IP address is pre-allocated to a single device
    - Automatic allocation
      - Assign an IP address permanently to a device
    - Dynamic allocation
      - Assign an IP address from a pool for a limited period of time
- ❑ Manual allocation
  - Equivalent to the method BOOTP used
  - For servers and routers
  - Administrative benefit

# Dynamic allocation

---

## ❑ Benefits for dynamic allocation

- Automation
  - No intervention for an administrator
- Centralized management
  - An administrator can easily look to see which devices are using which addresses
- Address reuse and sharing
- Portability and universality
  - Do NOT require DHCP server know the identify of each client
  - Support mobile devices
- Conflict avoidance

# DHCP Leases


---

- ❑ Dynamic address allocation is by far the most popular
  - Hosts are said to “**lease**” an address instead of “own” one
  
- ❑ DHCP lease length policy
  - A trade-off between stability and allocation efficiency
  - The primary benefit of using long lease is that the addresses of hosts are relatively stable
    - Servers
  - The main drawback of using long leases is to increase the amount of time that an IP can be reused
  
- ❑ Assigning lease length by client type
  - Use long lease for desktop computers
  - Use short lease for mobile devices
  
- ❑ Factoring lease renewal into lease length selection

# DHCP Lease “Life Cycle”

## Life cycle


- Allocation
- Reallocation
- Normal operation
- Renewal
- Rebinding
- Release

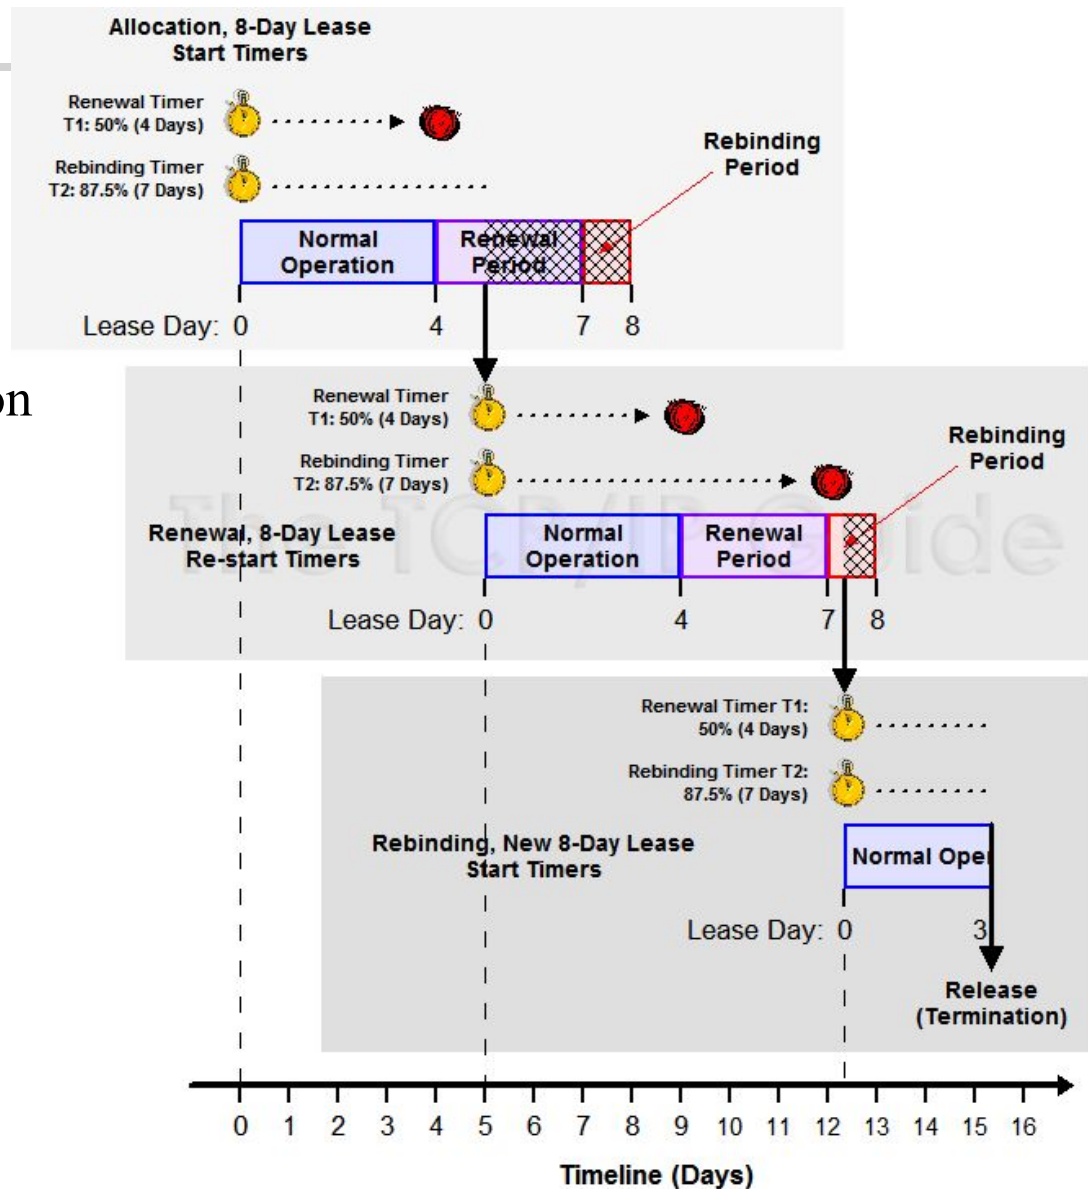




# DHCP Lease Address Pools

- Each DHCP server maintains a set of IP addresses
  - Use to allocate leases to clients
    - Most of clients are equals
      - A range of addresses is normally handled as a single group defined for a particular network

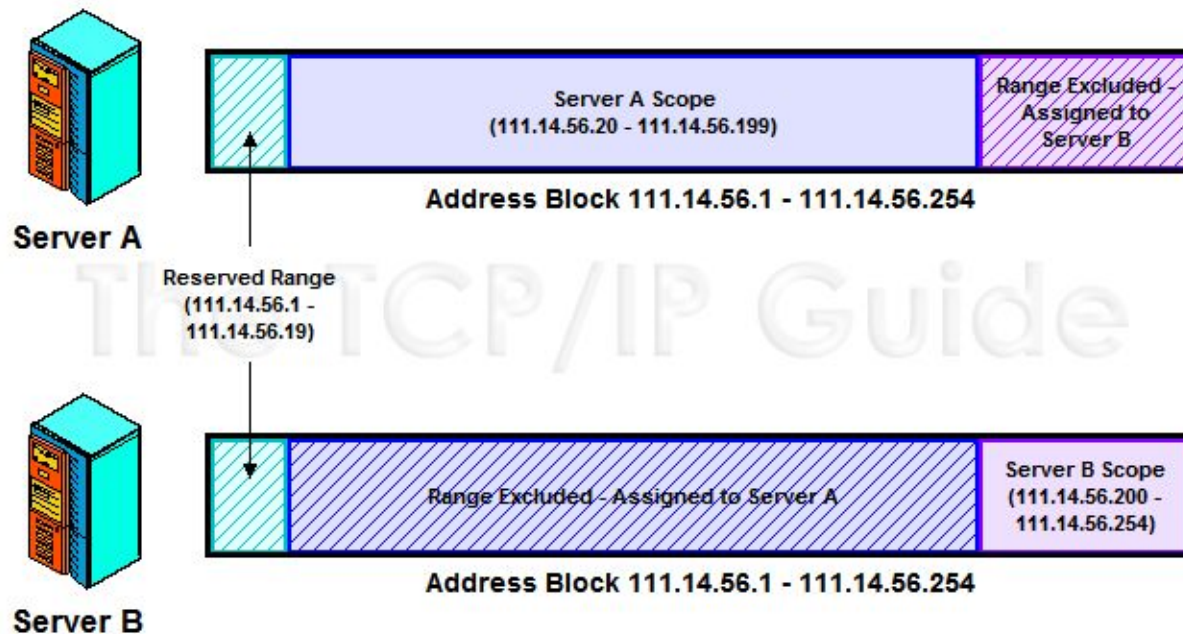

# DHCP Protocol (1)

- ❑ DHCP Discover
  - Broadcasted by client to find available server.
  - Client can request its last-known IP, but the server can ignore it.
- ❑ DHCP Offer
  - Server find IP for client based on clients hardware address (MAC)
- ❑ DHCP Request
  - Client request the IP it want to the server.
- ❑ DHCP Acknowledge
  - Server acknowledges the client, admit him to use the requested IP.
- ※ Question
  - Why not use the IP after DHCP offer?

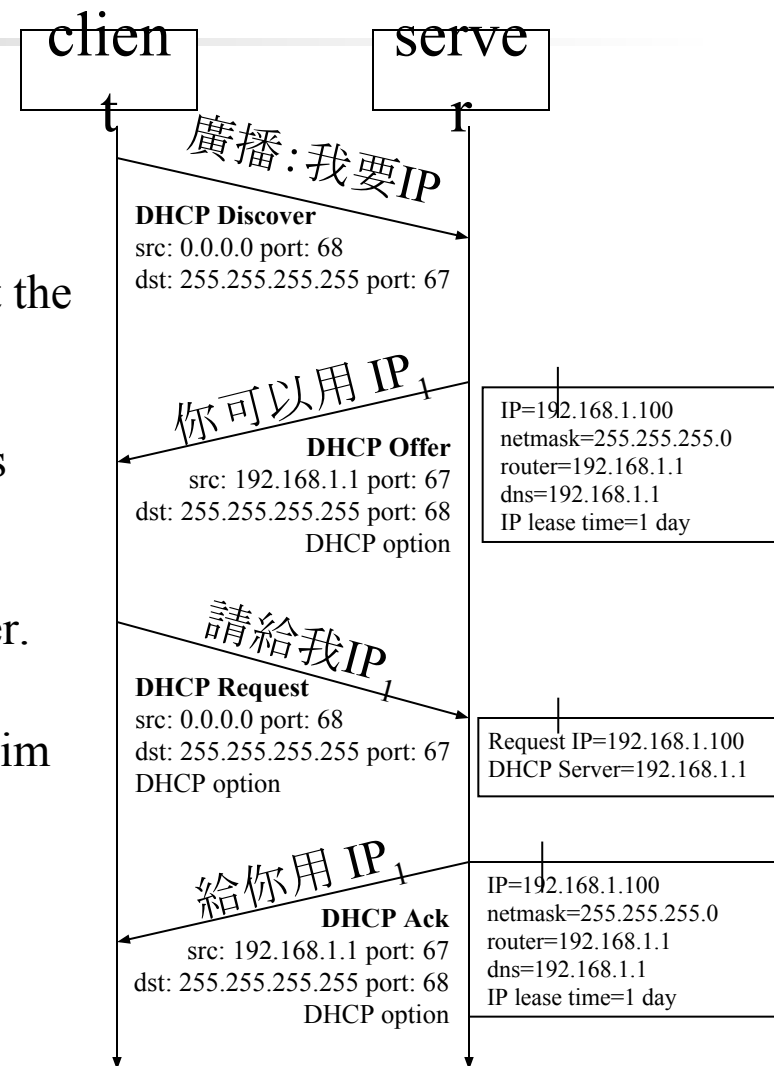

# DHCP Protocol (2)

---

## ❑ DHCP inform

- Request more information than the server sent.
- Repeat data for a particular application.
  - ex. browsers request web proxy settings from server.
- It does **not** refresh the IP expiry time in server's database.

## ❑ DHCP Release

- Client send this request to server to releases the IP, and the client will un-configure this IP.
- Not mandatory.

# DHCP server on FreeBSD (1)

---

- ❑ Kernel support
  - device bpf (FreeBSD 5.x↑)
  - pseudo-device bpf (FreeBSD 4.x↓)
- ❑ Install DHCP server
  - /usr/ports/net/isc-dhcp43-server/
  - % cd /usr/local/etc
  - % cp dhcpd.conf.sample dhcpd.conf
- ❑ Enable DHCP server in /etc/rc.conf

```
dhcpd_enable="YES"
dhcpd_flags="-q"
dhcpd_conf="/usr/local/etc/dhcpd.conf"
dhcpd_ifaces=""
dhcpd_withumask="022"
```

# DHCP server on FreeBSD (2)

## ❑ Option definitions

```
option domain-name "cs.nctu.edu.tw";
```

```
option domain-name-servers 140.113.235.107, 140.113.1.1;
```

```
default-lease-time 600;
```

```
max-lease-time 7200;
```

```
ddns-update-style none;
```

```
log-facility local7;
```



```
{  
/etc/syslogd.conf  
/etc/newsyslog.conf
```

# DHCP server on FreeBSD (3)

## ❑ Subnet definition

```
subnet 192.168.1.0 netmask 255.255.255.0 {  
    range 192.168.1.101 192.168.1.200;  
    option domain-name "cs.nctu.edu.tw";  
    option routers 192.168.1.254;  
    option broadcast-address 192.168.1.255;  
    option domain-name-servers 140.113.17.5, 140.113.1.1;  
    default-lease-time 3600;  
    max-lease-time 21600;  
}
```

## ❑ Host definition

```
host fantasia {  
    hardware ethernet 08:00:07:26:c0:a5;  
    fixed-address 192.168.1.30;  
}  
host denyClient {  
    hardware ethernet 00:07:95:fd:12:13;  
    deny booting;  
}
```

# DHCP server on FreeBSD (4)

---

## ❑ Important files

- `/usr/local/sbin/dhcpd`
- `/usr/local/etc/dhcpd.conf`
- `/var/db/dhcpd.leases` (leases issued)
- `/usr/local/etc/rc.d/isc-dhcpd`



# NAT – Network Address Translation

---



# IP address crisis

---

## ❑ IP address crisis

- Run out of class B address
  - The most desirable ones for moderately large organizations
- IP address were being allocated on a FCFS
  - With no locality of reference

## ❑ Solutions

- Short term
  - Subnetting and CIDR (classless inter-domain routing)
  - NAT (network address translation)
- Long term
  - IPv6

# Network Address Translation (NAT)

---

- ❑ Some important characteristics of how most organizations use the internet
  - Most hosts are client
  - Few hosts access the internet simultaneously
  - Internet communications are routed
- ❑ Network Address Translation
  - RFC 1631, in May 1994
  - A basic implementation of NAT involves
    - Using one of the private addresses for local networks
    - Assigned one or more public IP addresses
  - The word ‘translator’ refers to the device that implements NAT

# Private Address Space

---


- ❑ Private addresses space defined by RFC1918
  - 24-bit block (Class A)
    - 10.0.0.0/8
  - 20-bit block (16 contiguous Class B)
    - 172.16.0.0/12 ~ 172.31.0.0/12
  - 16-bit block (256 contiguous Class C)
    - 192.168.0.0/16 ~ 192.168.255.0/16
  
- ❑ Operation consideration
  - Router should set up filters for both inbound and outbound private network traffic

# Network Address Translation (NAT)

---

- ❑ What is NAT?
  - Network Address Translation
  - Re-write the source and/or destination addresses of IP packets when they pass through a router or firewall.
  - What can be re-written?
    - Source/destination IPs
    - Source/destination ports
- ❑ What can NAT do?
  - Solve the IPv4 address shortage. (the most common purpose)
  - Kind of firewall (security)
  - Load balancing
  - Fail over (for service requiring high availability)

# NAT Terminology

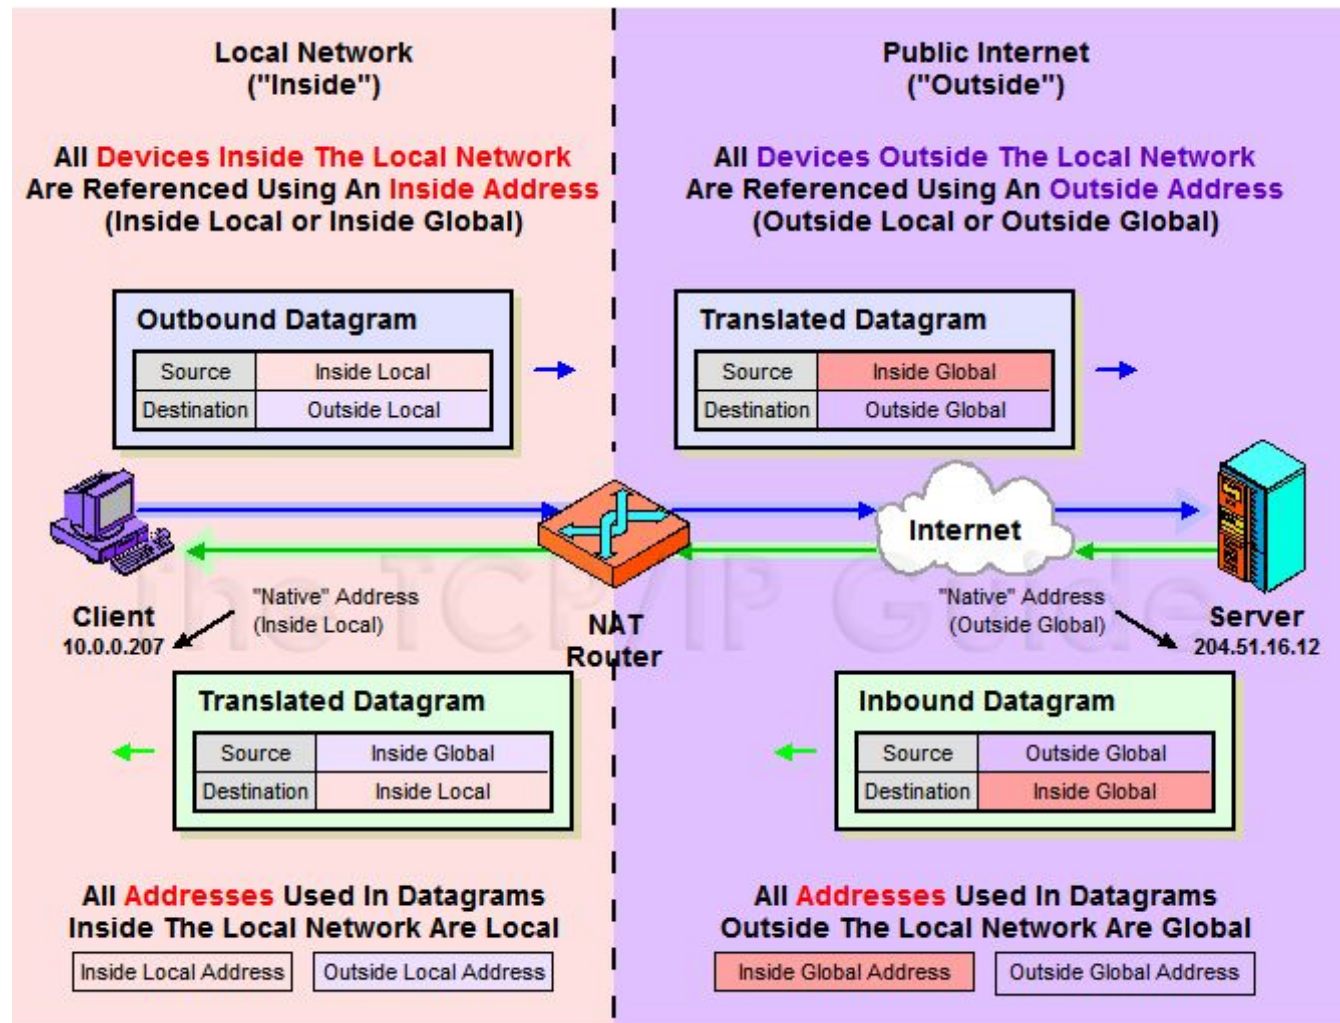

# NAT Address Mappings


---

- ❑ Each time a NAT router encounters an IP datagram
  - It must translate addresses
  - BUT, how does it know what to translate, and what to use for the translated addresses
  
- ❑ Translation table
  - Maps the inside local address to the inside global address
  - Also contains mappings between outside global address and outside local address for inbound translations
  
- ❑ Two address mappings
  - Static mappings
    - Allow the inside host with an inside local address to **always** use a inside global address
  - Dynamic mappings
    - Allow a pool of inside global addresses to be shared by a large number of inside hosts

# NAT Unidirectional Operation

## □ NAT Unidirectional Operation

- Traditional/Outbound operation
- The original variety of NAT in RFC 1631
  - The simplest NAT
  - The client/server request/response communication would sent from the inside to outside network

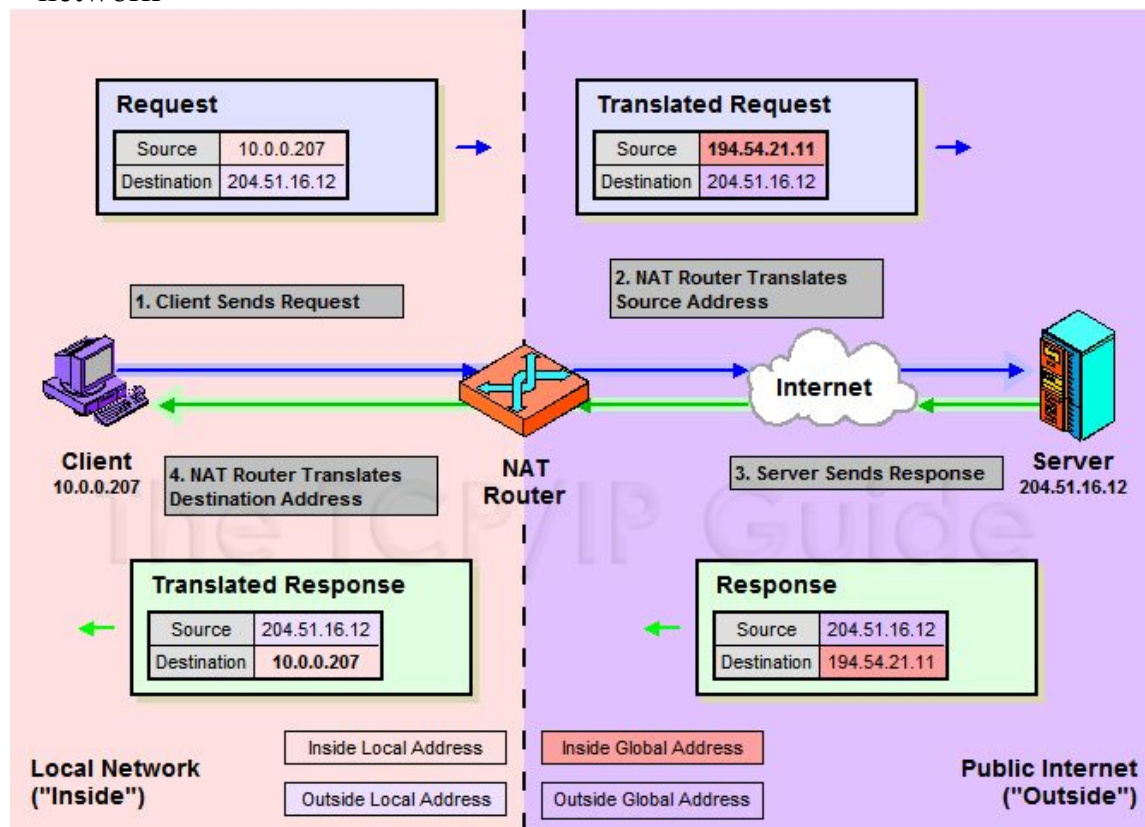

# NAT Bidirectional Operation

---

## ❑ NAT Bidirectional Operation

- Two-Way/Inbound operation
- A host on the outside network initiate a transaction with one on the inside

## ❑ The problem with inbound NAT

- NAT is inherently asymmetric
  - The outside network does not know the private addresses of the inside network
  - Hidden addresses are not routable
  - The outbound hosts DO NOT know the identity of the NAT router
  - NAT mapping table




# NAT Bidirectional Operation

---

- ❑ Two methods to resolve the hidden address problem
  - Static mapping
  - DNS
    - RFC 2694, DNS extensions to NAT
- ❑ The basic process is as follows
  - The outside host sends a DNS request using the name of the private host
  - The DNS server for the internal network resolves the name into an inside local address
  - The inside local address is passed to NAT and used to create a dynamic mapping
  - DNS server sends back the name resolution with the **inside global address**

# NAT Bidirectional Operation

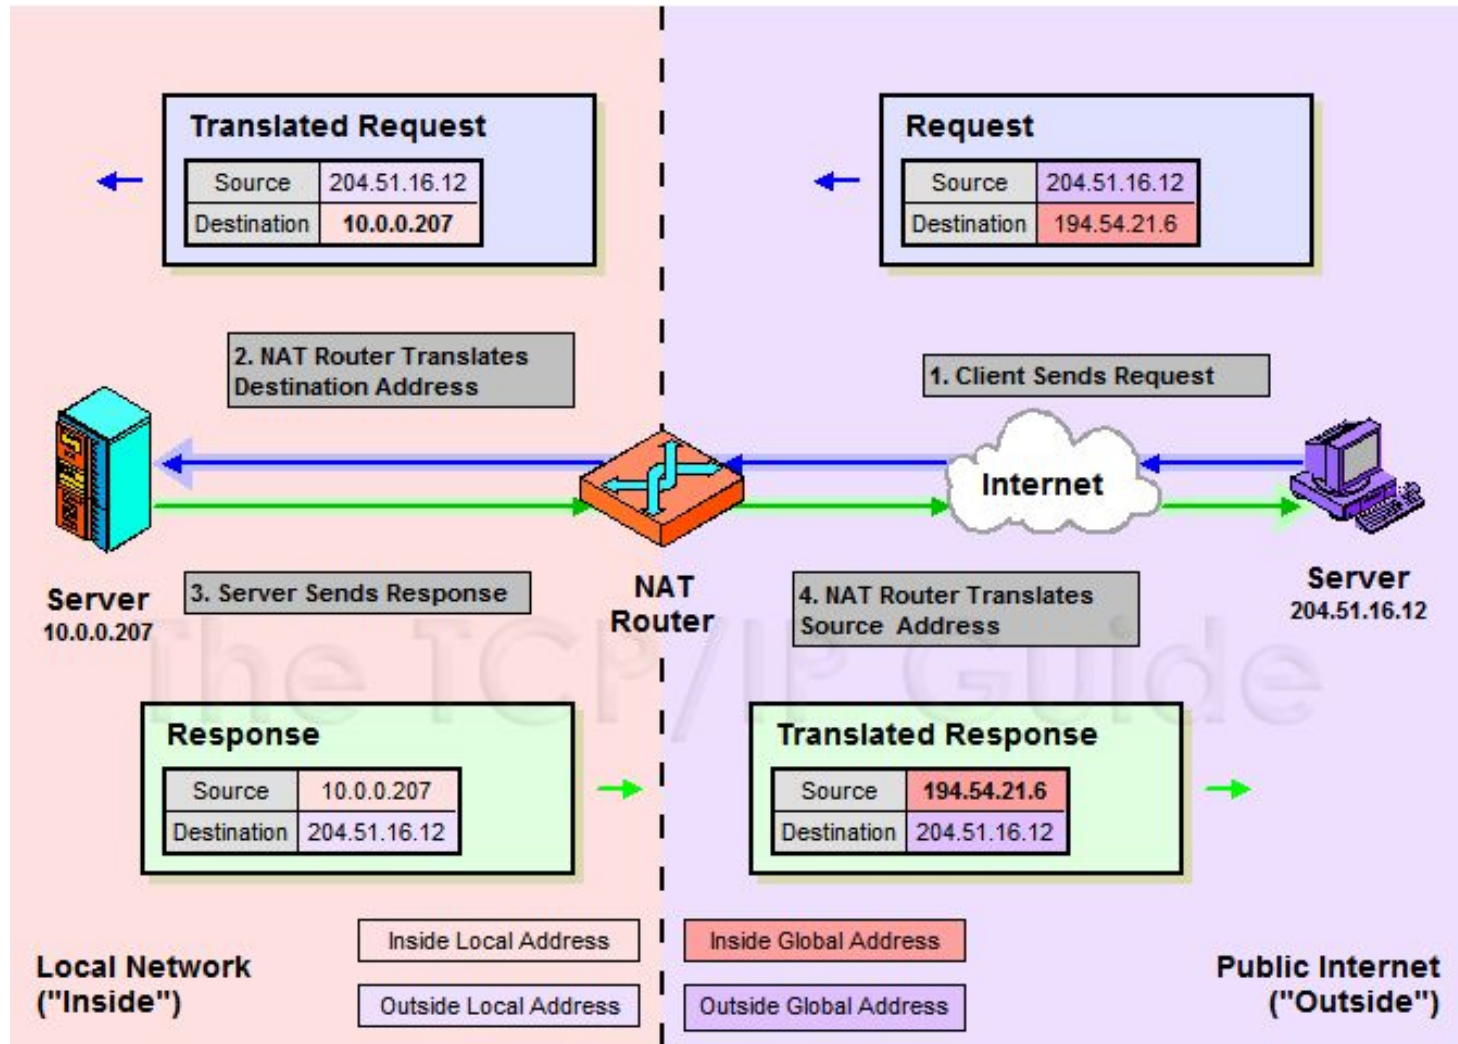

# NAT Port-Based Operation

---


## ❑ NAT Port-Based Operation

- Overloaded operation
- Network Address Port Translation (NAPT)/Port Address Translation (PAT)
- Both traditional NAT and bidirectional NAT work by swapping inside network and outside network addresses
  - One-to-one mapping between inside local address and inside global address
  - Use dynamic address assignment to allow a large number of private hosts to share a small number of registered public addresses

## ❑ Using ports to multiplex private addresses

- Also translate port addresses
- Allow 250 hosts on the private network to use only 20 IP address
- Overloading of an inside global address

# NAT Port-Based Operation

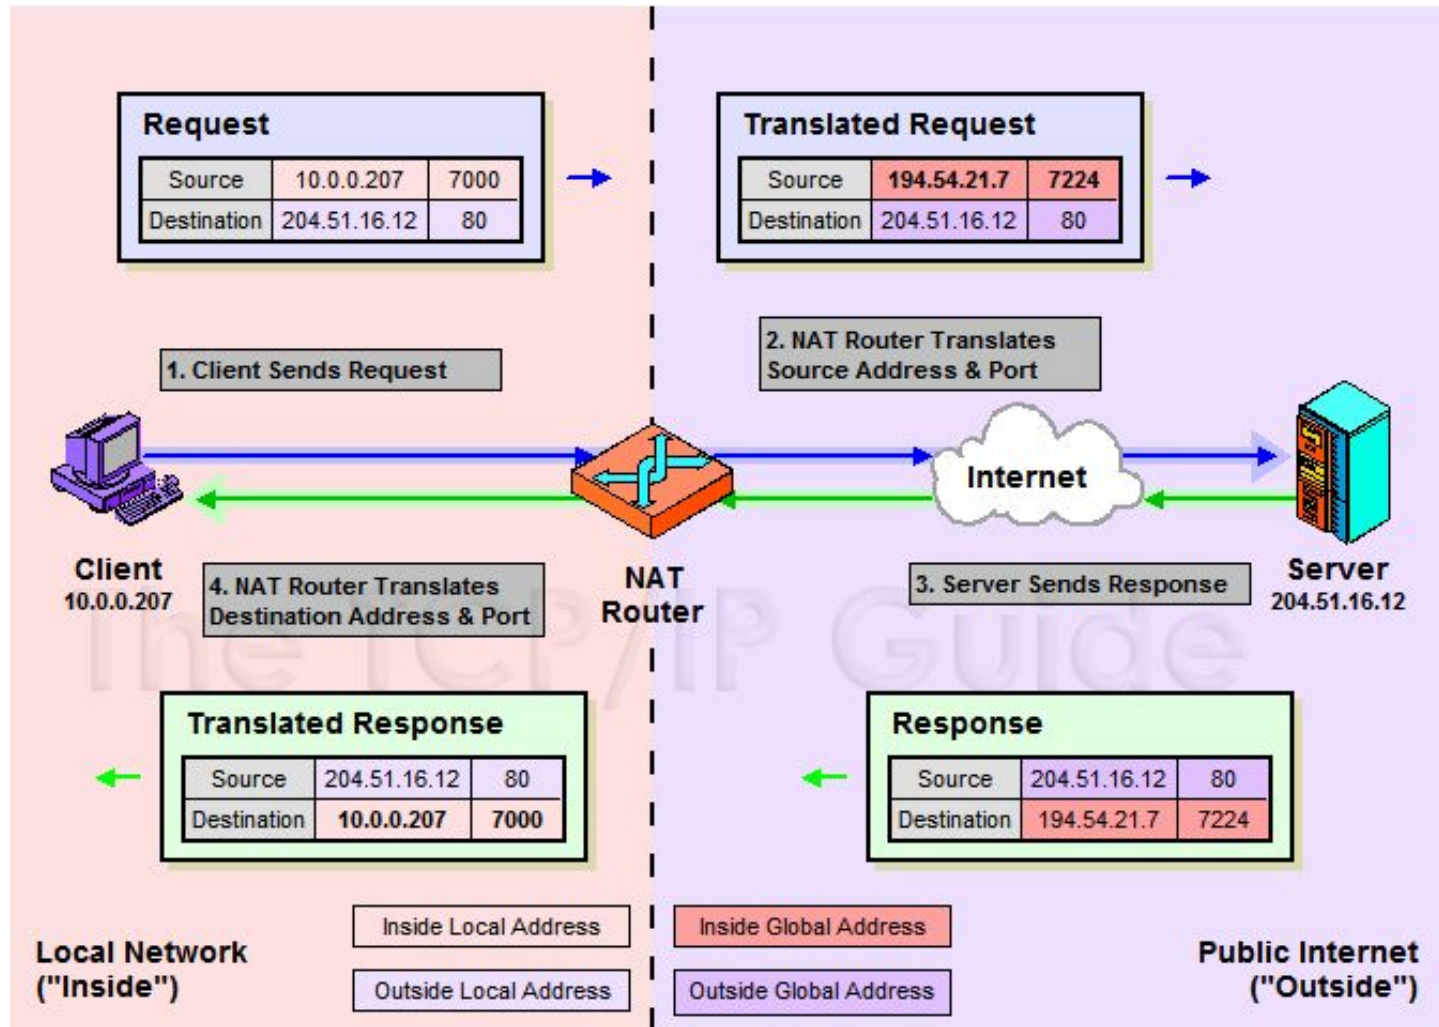

# NAT Port-Based Operation

## □ NAT example:

### NAT mapping table

Orig	Alias	Remote
192.168.1.1:1029	140.116.72.219:1029	↔ 140.116.72.72:23
192.168.1.1:1030	140.116.72.219:1030	↔ 140.116.72.72:23
192.168.1.2:1029	140.116.72.219:30029	↔ 140.116.72.72:21
192.168.1.2:1030	140.116.72.219:30030	↔ 140.116.72.72:21




# NAT Overlapping Operation

---

- ❑ NAT Overlapping Operation
  - Twice NAT Operation
  - The previous three versions of NAT are normally used to connect a network using private, non-routable addresses to the public internet
    - No overlap between the address spaces of the inside and outside network
- ❑ Cases with overlapping private and public address blocks
  - Private network to private network connections
  - Invalid assignment of public address space to private network
- ❑ Dealing with overlapping blocks by using NAT twice
  - Translate both the source and destination address on each transition
  - Rely on use of the DNS
    - Let the inside network send requests to the overlapping network in a way that can be uniquely identified

# NAT Overlapping Operation


- A client, 18.0.0.18, wants to send a request to the server [www.twicenat.mit.edu](http://www.twicenat.mit.edu), 18.1.2.3.
  - 18.0.0.18 sends a DNS request
  - NAT router intercepts this DNS request
    - Consult its tables to find a special mapping for this outside host
  - NAT router returns 172.16.44.55 to the source client

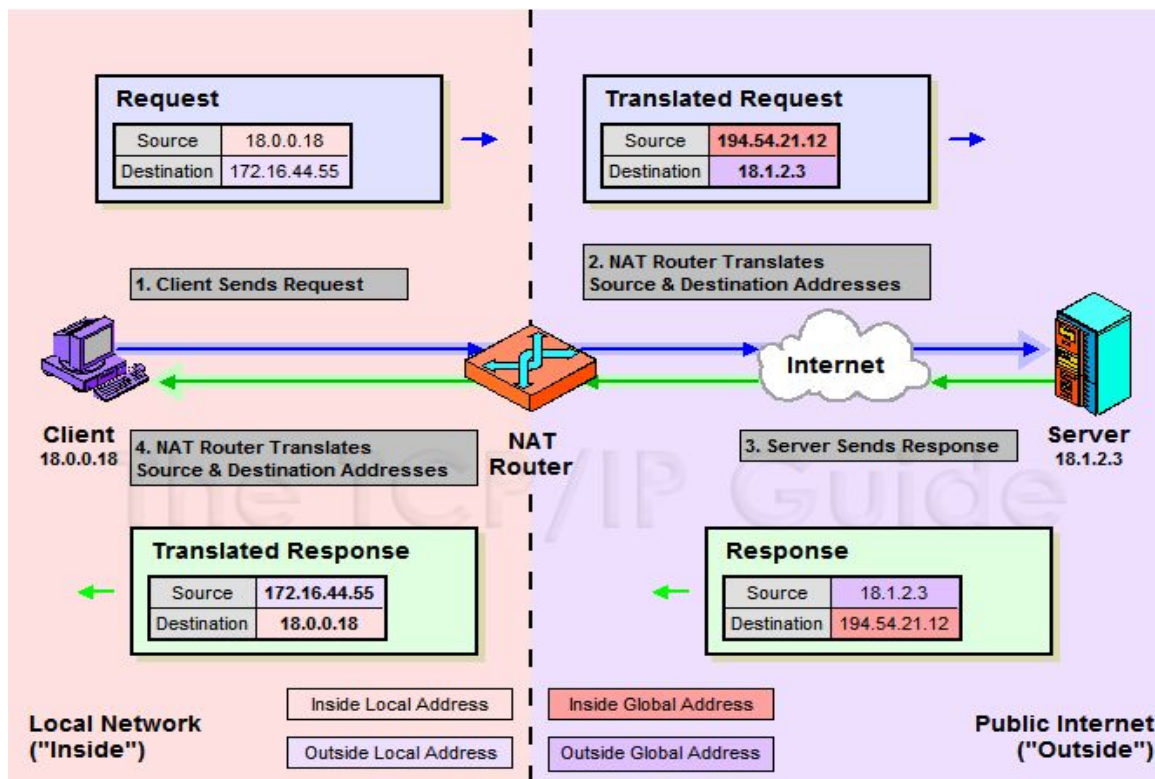

# NAT Compatibility Issues

❑ It is NOT possible for NAT to be completely transparent to the hosts that use it

- ICMP Manipulations

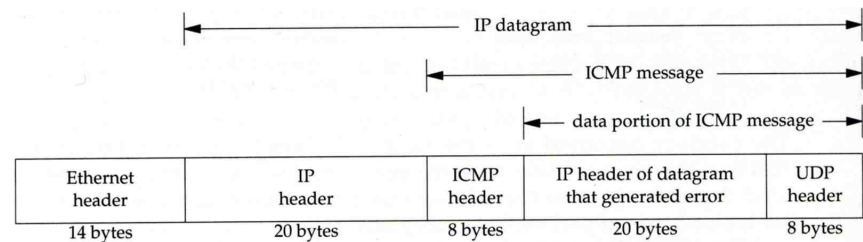


- Applications that embed IP address
  - FTP
- Additional issues with port translation
  - The issues applying to addresses now apply to ports as well
- Problems with IPSec



# SNAT


## □ SNAT & DNAT

- S: Source D: Destination
- SNAT
  - Rewrite the source IP and/or Port.
  - The rewritten packet looks like one sent by the NAT server.

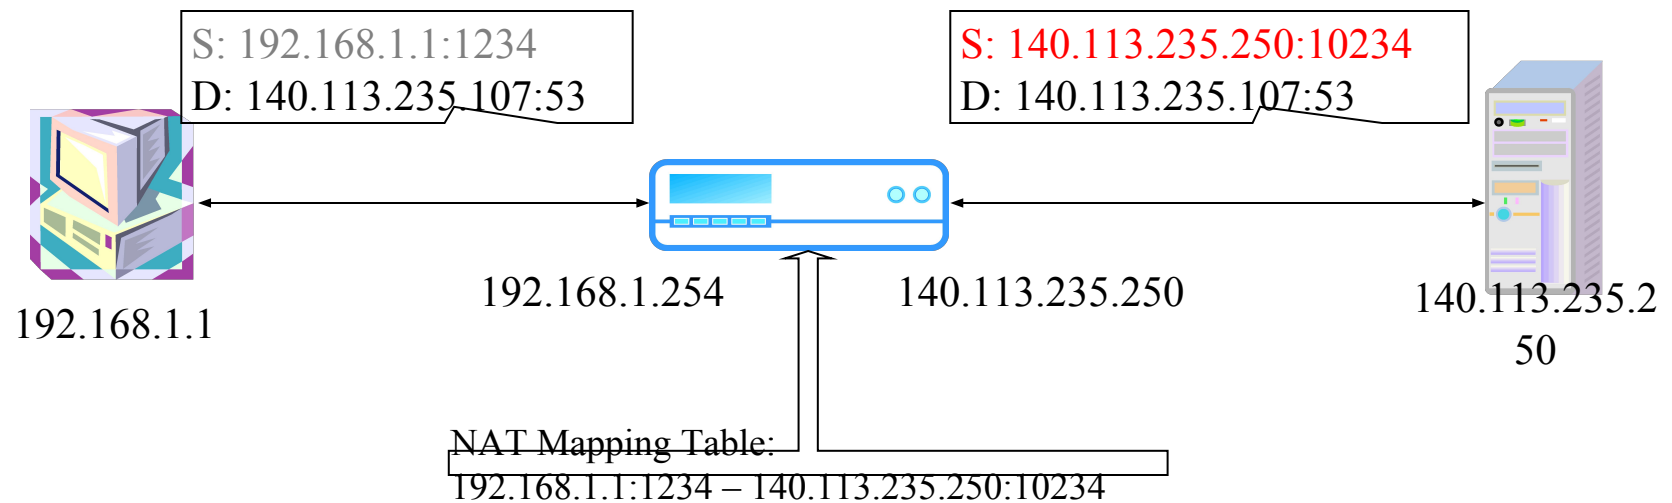

# DNAT

- DNAT
  - Rewrite the destination IP and/or Port.
  - The rewritten packet will be redirect to another IP address when it pass through NAT server.

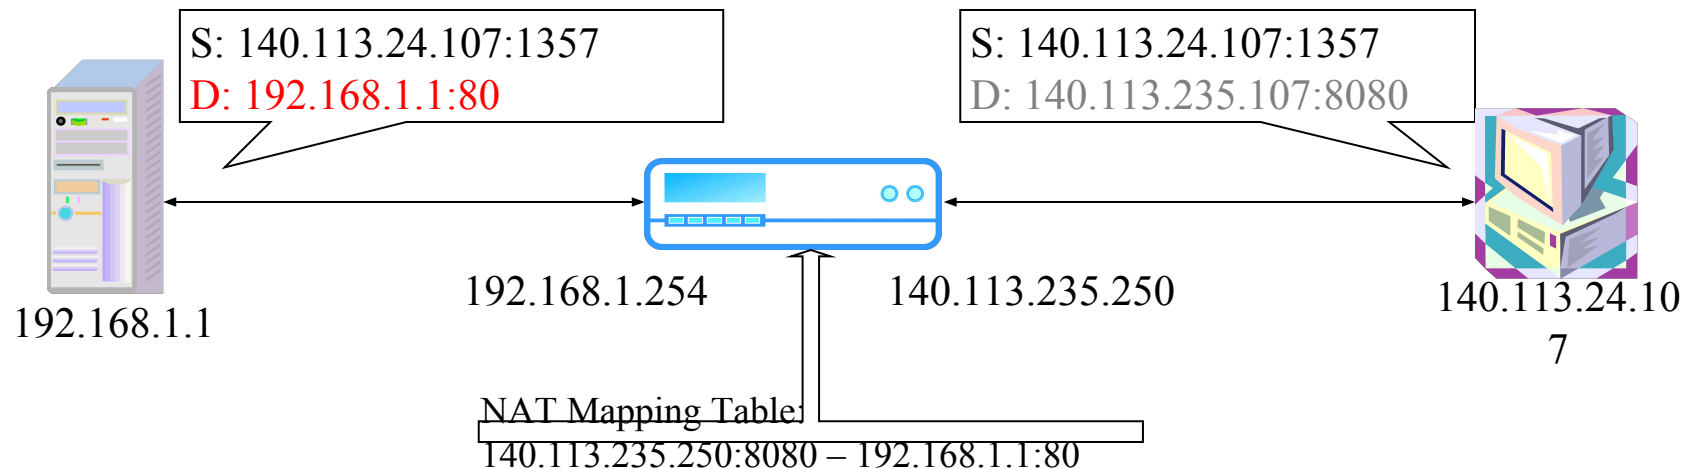


- Both SNAT and DNAT are usually used together in coordination for two-way communication.

# NAT on FreeBSD (1)

## □ Setup

- Network topology
- configuration
- Advanced redirection configuration

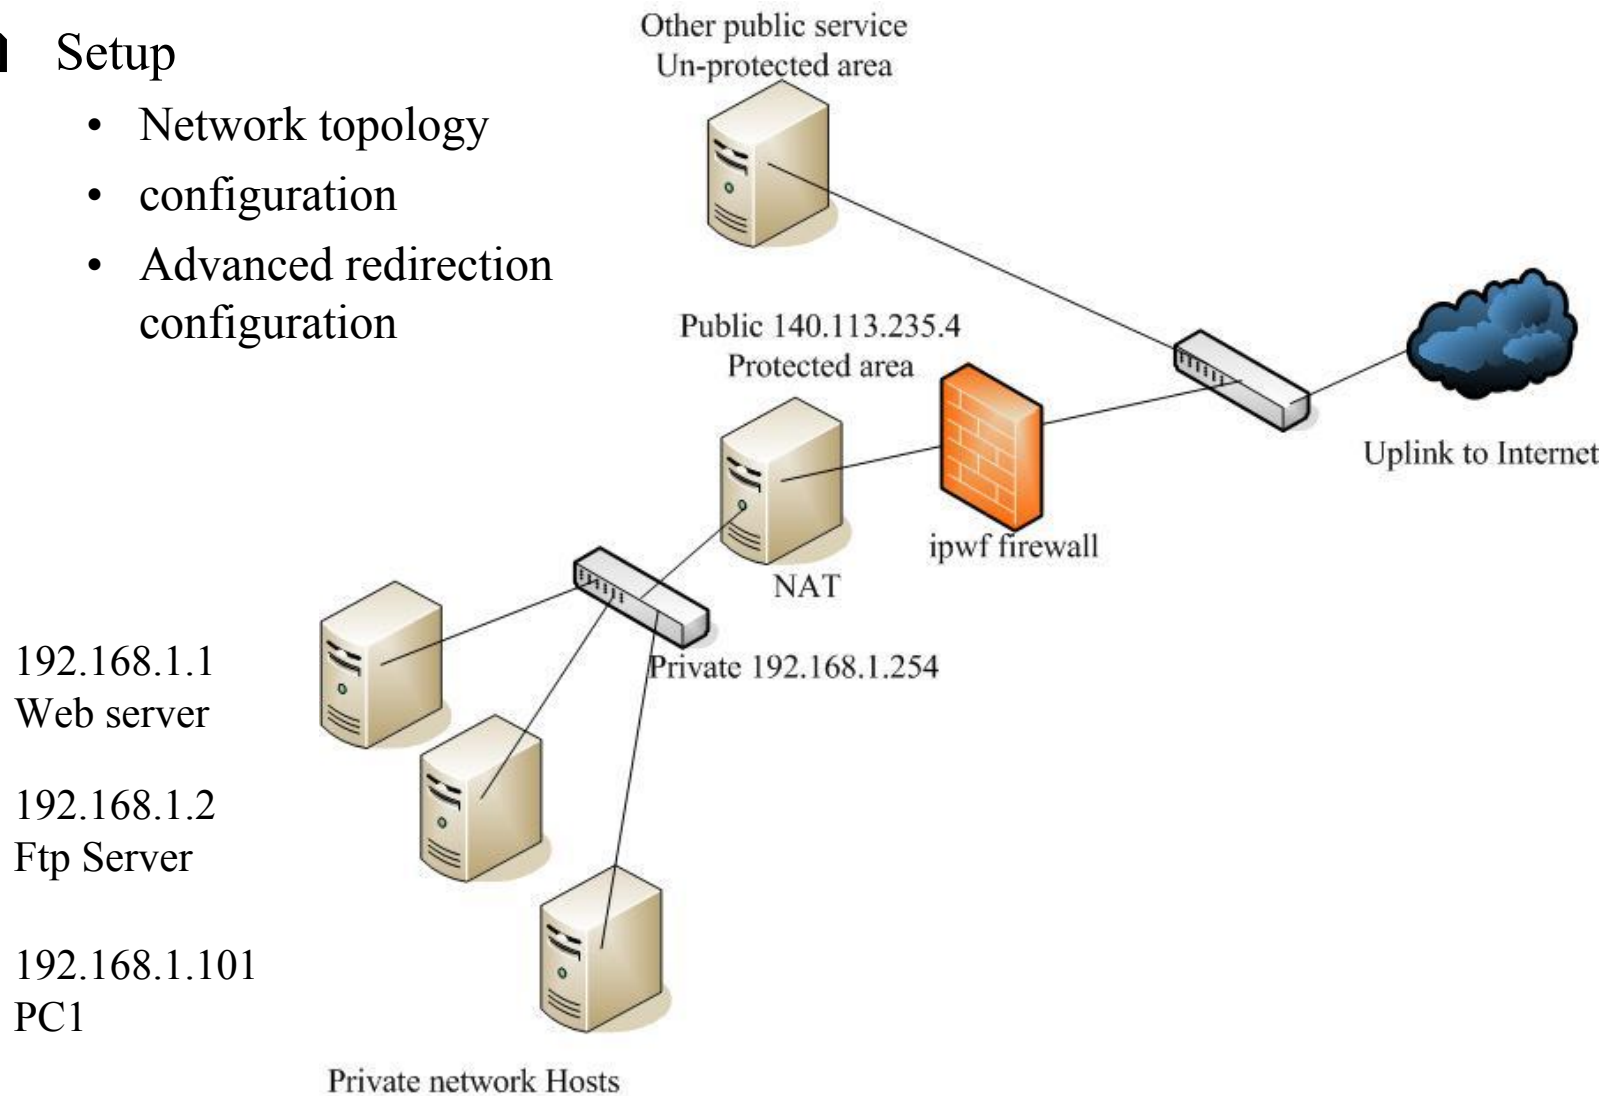

# NAT on FreeBSD (2)

## ❑ IP configuration (in /etc/rc.conf)

```
ifconfig_fxp0="inet 140.113.235.4 netmask 255.255.255.0"  
ifconfig_fxp1="inet 192.168.1.254 netmask 255.255.255.0"  
defaultrouter="140.113.235.254"
```

## ❑ Enable NAT

- Here we use Packet Filter (PF) as our NAT server
- Configuration file: /etc/pf.conf

- nat
- rdr
- binat

```
# macro definitions  
extdev='fxp0'  
intranet='192.168.1.0/24'  
webserver='192.168.1.1'  
ftpserver='192.168.1.2'  
pc1='192.168.1.101'  
  
# nat rules  
nat on $extdev inet from $intranet to any -> $extdev  
rdr on $extdev inet proto tcp to port 80 -> $webserver port 80  
rdr on $extdev inet proto tcp to port 443 -> $webserver port 443  
rdr on $extdev inet proto tcp to port 21 -> $ftpserver port 21
```

# NAT on FreeBSD (3)

---

```
# macro definitions
extdev='fxp0'
intranet='192.168.219.0/24'
winxp='192.168.219.1'
server_int='192.168.219.2'
server_ext='140.113.214.13'

# nat rules
nat on $extdev inet from $intranet to any -> $extdev
rdr on $extdev inet proto tcp to port 3389 -> $winxp port 3389
binat on $extdev inet from $server_int to any -> $server_ext
```